




SPECIFICATION:

JOSAM 22100-10 SERIES COATED CAST IRON COMBINATION ROOF DRAIN AND OVERFLOW DRAIN WITH CAST IRON DOME, WEJLOC® NON-PUNCTURING CLAMP RING WITH INTEGRAL GRAVEL STOP, INTEGRAL CAST IRON STANDPIPE IN CAST IRON DECK FLANGE AND DUAL NO-HUB BOTTOM OUTLETS WITH FIXED EXTENSION FOR PRIMARY DRAIN. OVERFLOW EXTENDED TO DESIRED HEIGHT BY OTHERS.

**ROOF DRAIN
COMBINATION, FIXED EXT.**

SERIES **22100-10**

DOME FREE AREA: 37.6 SQ. IN.

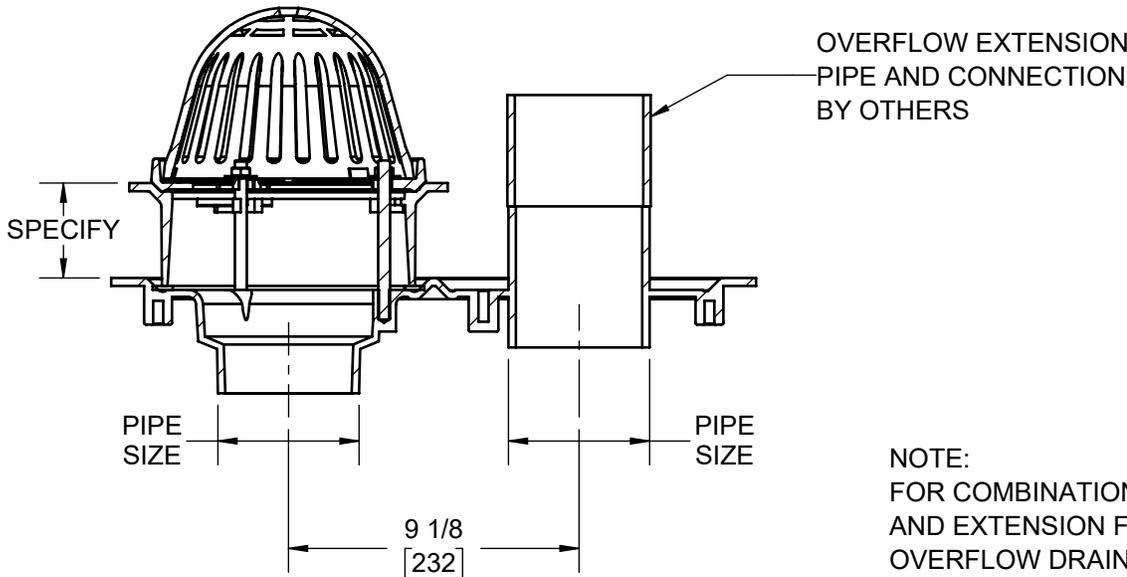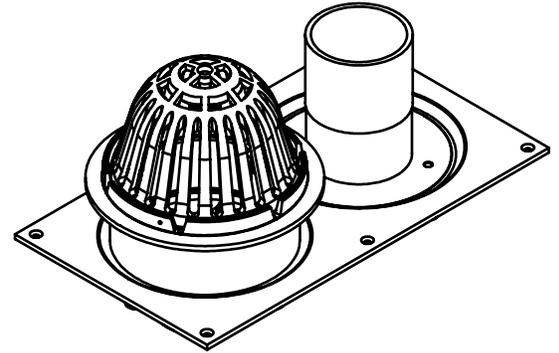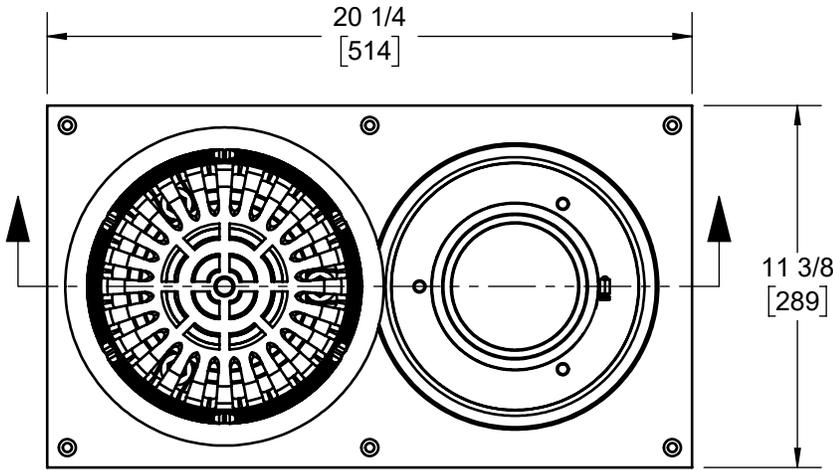

NOTE:
FOR COMBINATION DRAIN WITH CLAMP RING AND EXTENSION FOR BOTH PRIMARY AND OVERFLOW DRAINS OR FOR SIMILAR SOLUTION WITH 2" OUTLET CONNECTIONS, USE 22080-Q5-RCSD-10

OPTIONS:

-1	DECK CLAMP ASSY
-19	PERF. SS GRAVEL GUARD
-20	GALV. CAST IRON PARTS
-21	GALV CAST IRON DOME ONLY
-23	ROUGH BRONZE DOME
-33	SS MESH SCREEN COVERED DOME
-VP	SECURED DOME

	PIPE SIZE
	3"
	4"

SPECIFY EXTENSION HEIGHT: _____

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 11/13/2023

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



MICHIGAN CITY, INDIANA

NOTES